Proposal for indoor p5mm HD Screen



P5mm Iron cabinet economic solution





Iron cabinet back view



cabinet front view


module

P5mm aluminum cabinet solution






Die-Cast Aluminium cabinet back view



module

cabinet front view

P5 mm Rental steel cabinets

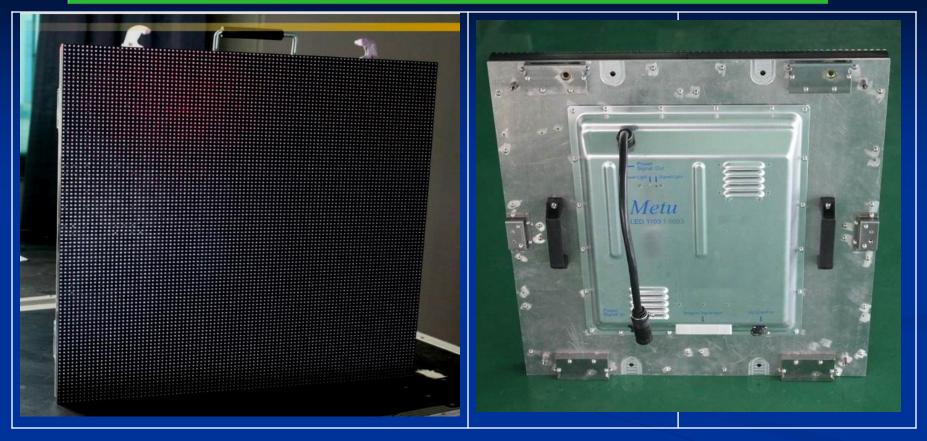

Ultra slim cabinet 10kg only



Black led module

Ultra slim back view cabinet

module

Technical Specifications Led Display System, pitch 5 mm Indoor High Definition.

Pitch (mm)	P5	
Model No.	SLD—14/15-P5-1R1G1B(3in1)	
Dimension (WxH)	160mm x 80mm	
Cabinet Size	480 X 480 mm	
Module Resolution	32 x 16	
Density (pixels/m2)	40000	
Brightness Density	1800 cd/m2	
Viewing distance	3m ~100m	
Power consumption (Avg)	600 w/m2	
Power consumption (Max)	1400 w/m2	
Weight	10 to 25 kg per cabinet	
Drive Mode	1/8 scanning	
Viewing angle	Horizontal angle: 120°; Elevation angle: 60°; Depression angle: 60°	
Gray scale	256 gray scale in each red, green, blue color	
Colors	16 Million Colors	
Refresh Velocity	= 60 frame/sec	
Refresh Rate	Up to 4800HZ	
Display Life	> I00 k hours	
Display MTBF	10,000 hours	
Blind Pixels Rate	= 0.0003	
Working Voltage	AC 230V±15% 47 ~ 64HZ	
Effective Control Distance	100m (1000 BASE-T Ethernet cable) 500 mtrs (optical fiber)	
Operation Temperature	-20° C ~ 60° C	

Other Perameters

Contents	Detail
Viewing angle	Horizontal:110 degree;Vertical:75degree
Color display	10.7billion
Driving Method	1/4 Static,Constant current
Driving Method	1/4 Static,Constant current
Refresh frequence	480HZ
luput signal	RF,S-VIDEO,rgb,RGBTV,YUT ,YC,COMPOSITION
Working environment	Temperature-20 C~ +60 C; Humidity:10%~95%
Input Voltage	AC110V/60HZ;AC220V/50HZ optional

Key Features and Advantages

- 1. As R-G-B LED, more colorful than ordinary LED displays enabling them to show high frequency dynamic images.
- 2. The brightness is higher because of advantage from its built-in reflection cavity.
- 3. P7.6, P6 and P4 Led Display has high brightness and adjustable contrast. This model has a good lighting accordance and has no mosaic
- 4. Pixel pitch can be made very small; high resolution is suitable for closer watching.
- 5. Viewing angle is available up to 160 degrees; the showing contents won't be disordered.
- 6. Integrated and modularized design, reasonable layout, is the best advantage for heat dissipation.
- 7. Our LED screen is controlled by instant current and high gray degree technology, so it is long lifespan, rich color and uniform light.
- 8. It's high guaranteed for good quality produced by high speed auto mount machine.
- 9. Simple and light frame is easy for installation

note- p 7.6, P6, p5 & P4 mm Led Display picture of the rental services to various clients are attached in our project Details, please have a glance

LED Display Systems Installation

Display Systems Allocation Installation Process

LED Display System Allocation

The LED Display Screens will be allocated at the locations as per the guidelines from Clients

LED Display System Installation

AS per the dates given for the installation the complete installation of the display system will take place a as possible earlier of the starting date after confirming the order.

Once the Set up get installed at all the location there will be sufficient time for test run and coordination with the display oriented activities.

LED Display Systems On Site Management

- Control Units
- Technical Support
- Other Back-up Support

Technical Support

- LED screen is made of led bricks which are available all the time at all the locations, any problem in bricks will be replaced immediate.
- Zone wise we are based in Delhi, Mumbai, Banglore, Kolkata, Ahmedabad, Indore, Chandigarh and Ranchi
- We ensure the after sale services with in 24-48 hours in case of none city and 24 hours in same city.
- LED screen can be design in any size any dimension as per the clientele requirement we provides the 2 time led design adjustment after installation for free.

Control Units

- 1. Controllers are compatible for any of the input like VGA, DVI, All video supportable and live performance as well with coordination with video production team.
- **2.** Our Switcher can accept the input (any Source) for data and video Display on Screens.
- 3. The cabling and Control Panel set up will be based on onsite location analysis.
- 4. We provide controller in 3 user applications
 - 1. Sending card
 - 2. Asynchronies <u>USB</u> control card
 - 3. Video processor

Why Us

Our Projects Our Clients

Our Recent Projects Events









Our Recent Projects indoor









Our Recent Projects outdoor



ShinoBiz Lighting & Display

Biggest Outdoor & Indoor Led Screen on Rental & Hire





Some Of Our Prestigious Clients



Note- the above clientele and Pics given for the reference are based on our LED Display screen rental performance basis For your reference we can provide you our more clientele with their Details as well.

Thank you

We Wish you a Shining growth

Thanks & Regards

ShinoBiz Lighting And Display HelpLine +91 9990283289 & 9810653503 Skype id- shinobizskype Whats App id- +91 9990283289 Land Line (office) - 011-26364139 Mail - info@shinobiz, shinobiz@outlook.com Website :- swww.shinobiz.com

Mail Us- info@shinobiz.com, shinobiz@live.Com Web- www.shinobiz.com Contact Us-, 09810653503, 09990283289